



ABS Digital Thickness Gauge with ID-S

Item number: 547-526S

Images



Description

This ABSOLUTE Digimatic Thickness Gauge is equipped with the standard and cost effective model of a digital indicator.

It enables you to measure film, paper, etc. with flat contact points and tube wall thickness.


- Monodirectional communication via Digimatic data output.

Features

Digital/Analog:	Digital
Inch-Metric:	Inch/Metric
Delivered:	In a box with SR44 battery, spindle lifting lever 21AZB149
Range:	0~0.47 " / 0~12 mm
Type:	With digital indicator with 3/8" stem refer to ANSI/AGD
Digital step:	0,0001"/0,001mm
Parallelism:	0,0002"
Indicator No.:	ID-S No. 543-793BS (ANSI/AGD type)
Max. measuring depth:	30 mm
Max. response speed:	Unlimited

Alarm:	Low voltage, counting value composition error, overflow error
Contact point:	Thread # 4-48UNF
Power supply:	1 battery SR-44
Battery life:	Approx. 7000 hours
ON/OFF:	Yes
Inch/Metric switchable:	Yes
Mass:	225 g

Dimensions

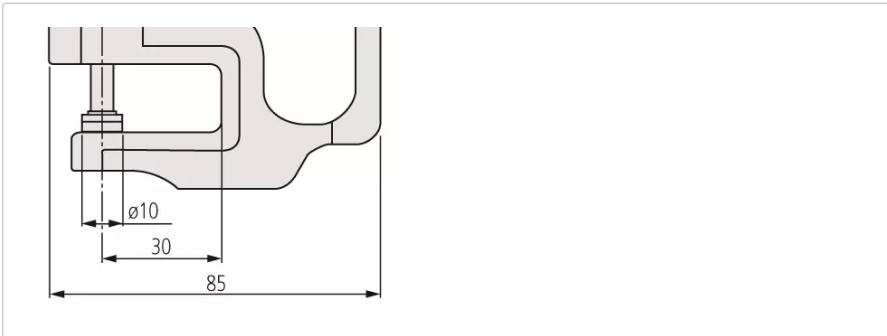

Accessories

Optional accessories:



Digimatic Cable, Flat Straight Type

1m
Art No. 905338
Suggested retail price: 37.00 €*



Digimatic Cable, Flat Straight Type

2m
Art No. 905409
Suggested retail price: 44.00 €*

